

# CeaGuard 48

## Components and Options




Three-phase monitor

### Three-phase monitor

When one phase fails the module switches a relay contact and interrupts the serial electronic 24 V current loop. The safety luminaires in non-maintained operation are switched to mains operation as long as the CeaGuard 48 is supplied with mains supply.

Dimensions mm (H x B x T)	85 x 52.5 x 65
Housing material / Colour	Plastic / red
Connection terminals	2.5 mm <sup>2</sup> rigid and flexible
Type of mounting	DIN rail
Contact	0.5 A/24 V AC/DC, 1 x open contact, 1 x converter
Pitch	3 units
Trigger threshold	$U < 85 \% U_N$

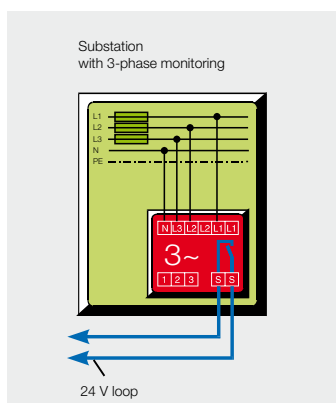

### Ordering details

Type	Scope of supply	Order No.
Three-phase monitor	Module	4 0071 343 430



F3 remote indication

### F3 remote indication

The CEAG F3 remote indication indicates the status of a CeaGuard 48 cover. The following is indicated via three potential-free indicator contacts:

- mains operation
- battery operation
- system failure

Backed up by an own battery supply of the CeaGuard 48 cover, these indications are also displayed in a mains fail condition. The connected CeaGuard 48 cover can be put out of operation by means of an integrated key-operated switch.

Connection terminals	2.5 mm <sup>2</sup> rigid and flexible
Dimensions mm (H x B x T)	180 x 80 x 55
Enclosure	Plastic enclosure for surface mounted installation

### Ordering details

Type	Scope of supply	Order No.
F3 remote indication	Module	4 0071 338 497

